



Specialist Control Panels
HEATING & VENTILATION

CAPILLARY FROST THERMOSTAT

FEATURES

- Enclosed switch contacts
- Operating range: -35°C to +35°C
- Maximum bulb temperature: 50°C
- Capillary length: 1000mm
- Dimensions: 102 x 55 x 50mm


INSTALLATION INSTRUCTIONS

The frost stats sensor should be attached to the heating coil pipe work.

The frost stat should be set at around +5°C.

The capillary of the sensor should not be kinked at any stage.

Check the circuit diagram for wiring configuration, if the circuit shows N.C. use terminals C and 1, if the circuit shows N.O. use terminals C and 2.

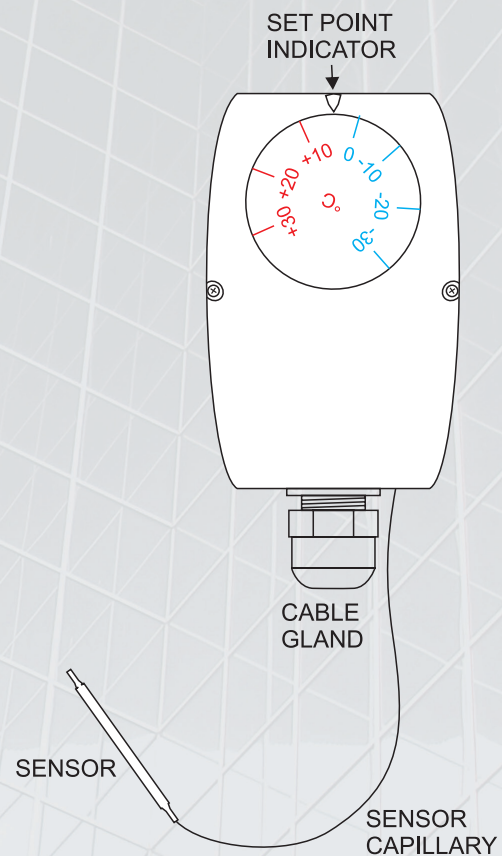

N.B. MAXIMUM VOLTAGE 250VAC MAXIMUM CURRENT 16AMP RESISTIVE

WARNING : SWITCH OFF POWER BEFORE REMOVING PLASTIC COVER

The information provided in the literature is believed to be accurate (subject to change without notice), however, use of such information shall be entirely at user's own risk.

ENQUIRIES

+44 (0)1258 480802

Sarum Electronics Ltd

5 – 7 Holland Business Park, Holland Way
Blandford Forum, Dorset, DT11 7TA

www.sarumelectronics.co.uk | info@sarumelectronics.co.uk